


DURATRANS L

Transition And Balancing Profile In Aluminium

DURAL

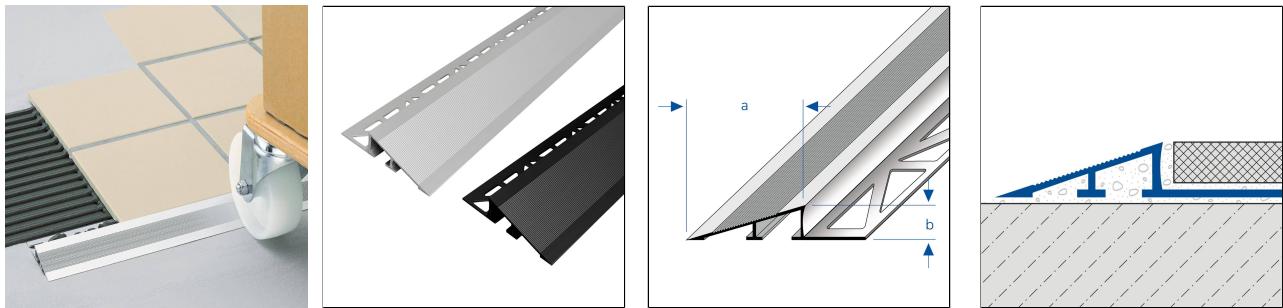

MATERIAL

Aluminium can be used wherever a medium mechanical stresses are expected. Contact with alkaline materials (e.g. tile adhesive) can lead to discolouration, which can be difficult to remove afterwards. High humidity during the drying phase can intensify this process. Always wipe off tile adhesive or grout on visible surfaces immediately with plenty of water, then wipe dry and ensure that the room is well ventilated.

Suitability in terms of mechanical and chemical resistance must always be checked on a case-by-case basis.

CARE

Aluminium does not require any special care. If necessary, it can simply be damp-cleaned with clear, clean water and a few drops of washing-up liquid. Then wipe dry.

Acidic, alkaline and abrasive cleaning agents should be avoided.

PROCESSING

1. Select the profile according to the tile thickness.
2. Apply tile adhesive with a notched trowel.
3. Press the profile into the adhesive bed and align.
4. Fill over the entire surface of the fixing leg.
5. Press the tiles firmly into place and align them so that they are flush with the upper edge of the profile. Lay the tiles fully flush.
6. Use suitable inner or outer corner pieces.
7. Leave a grout line of 1-2 mm to the profile.
8. Fill the space between the tiles and the profile completely with grout.

Protect visible surfaces from contact with tile adhesive or grout and, if necessary, clean immediately with a cloth and clean water. Then wipe dry.

The generally recognised rules of technology must be observed. Suitability in terms of mechanical and chemical resistance must always be checked on a case-by-case basis.

Please note: For technical reasons, tolerances in color effects of the materials and print are possible. All information is based on the best of our knowledge and belief. No guarantee can be derived from this. We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.



TECHNICAL DIMENSIONS AND PRODUCT VARIANTS

Material	[Aluminium]
Surface	[powder coated], [natural], [anodised]
Colour	natural, silver, black matt (RAL 9005)
Length	250 cm
sight width	45 mm, 50 mm, 57 mm, 64 mm
Height	12.5 mm, 11 mm, 15 mm, 20 mm

PRODUCT VARIANTS

Ident	Height	Surface	Colour	Length
DTAE 110-L/250	11 mm	anodised	silver	250 cm
DTA 110-L/250	11 mm	natural	natural	250 cm
DTACM 1111-L/250	11 mm	powder coated	black matt (RAL 9005)	250 cm
DTAE 125-L/250	12.5 mm	anodised	silver	250 cm
DTA 125-L/250	12.5 mm	natural	natural	250 cm
DTACM 1211-L/250	12.5 mm	powder coated	black matt (RAL 9005)	250 cm
DTAE 150-L/250	15 mm	anodised	silver	250 cm
DTA 150-L/250	15 mm	natural	natural	250 cm
DTACM 1511-L/250	15 mm	powder coated	black matt (RAL 9005)	250 cm
DTAE 200-L/250	20 mm	anodised	silver	250 cm
DTA 200-L/250	20 mm	natural	natural	250 cm
DTACM 2011-L/250	20 mm	powder coated	black matt (RAL 9005)	250 cm

Please note: For technical reasons, tolerances in color effects of the materials and print are possible. All information is based on the best of our knowledge and belief. No guarantee can be derived from this. We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.