



NHP / NSP / NRP

Heavy Duty



Slimline

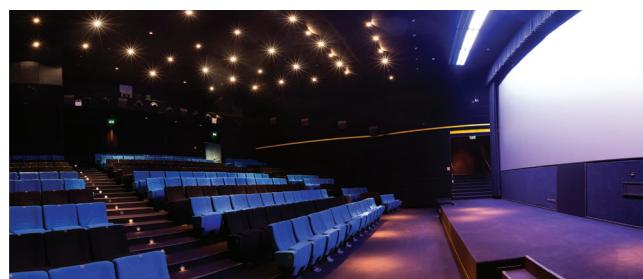

Product Description

The profile is designed to be used in most commercial and domestic applications, the rear of the profile tapers to 3mm offering greater installation opportunities. A wide variety of PVC coloured inserts and channel options (on request) to offer numerous colour combinations.

Technical Details

Not recommended for use above 60°C, resistant to most oils, alcohols, petrol's and fats. It is unsuitable for use in contact with aromatic and chlorinated hydrocarbons, ketones, nitro-compounds, esters and cyclic esters will cause some swelling.

Dimensions

Stock Lengths of 3.22m.

Maintenance

Inserts: All inserts should be cleaned using a neutral detergent and thoroughly rinsed with clean water. Ensure all inserts are dry prior to receiving foot traffic.

Installation

1. Ensure the steps are dry, clean, free of debris, level and even.
2. If pre-drilled use the drill holes to mark steps for drilling location.
3. Drill and Plug the steps.
4. Apply suitable adhesive to the underside of the nosing and apply nosing to the step.
5. Screw down the step with the appropriate size screws.
6. Apply insert (if separate) or insert pip to cover the screw head.

Insert Options (see details overleaf)

Standard Insert



Tredsafe® Insert

