


T-FLOOR Brass

Separating and cover profile for retrospective installation

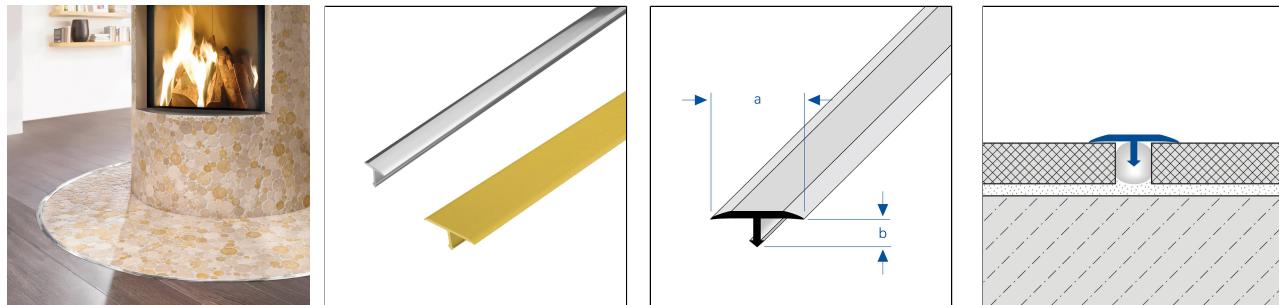

MATERIAL

Brass is particularly suitable for indoor areas with medium mechanical loads.

Brass oxidises (patinates) in the air. When used in damp rooms or in conjunction with aggressive cleaning agents, this process can intensify and stains may form. If necessary, polish with special cleaning pastes.

The applicability with regard to mechanical and chemical resistance must always be checked in each individual case.

CARE

Brass does not require any special care. If necessary, it can simply be cleaned with clear, clean water to which a few drops of household cleaning agent (washing-up liquid, citric acid) have been added. Then wipe dry.

The patina that develops over time on untreated brass surfaces can be removed by polishing with a soft cloth and washing-up liquid or citric acid. Then wipe dry.

Do not use abrasive products.

PROCESSING

1. Ensure the wall /floor junction is clean and free of debris (at least 5 mm deep).
2. Inject the wall/floor junction with an elastic sealing material (SPEED-FLEX or similar).
3. Press in the centre bar of the profile until the profile is firmly adhered to the surfaces on both sides.
4. Use the matching internal and external corner pieces available as accessories to form corners. In terms of installation, the internal or external corner pieces should be fitted first, then the profile should be fully installed without leaving a joint.
5. Close the open ends with the appropriate end caps.

The generally recognised rules of technology must be observed. The suitability with regard to mechanical and chemical resistance must always be checked in each individual case.

Please note: For technical reasons, tolerances in color effects of the materials and print are possible. All information is based on the best of our knowledge and belief. No guarantee can be derived from this. We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.



TECHNICAL DIMENSIONS AND PRODUCT VARIANTS

Material	[Brass]
Surface	[natural], [chromed], [high-gloss polished]
Colour	natural, chrome
Length	100 cm, 250 cm
sight width	14 mm, 25 mm
Height	7 mm, 9 mm
Width mm	14 mm, 25 mm
height up to	8 mm

PRODUCT VARIANTS

Ident	Height	Surface	Colour	Length
TFM 2500-SC/100	7 mm	chromed	chrome	100 cm
TFM 2500-SC/250	7 mm	chromed	chrome	250 cm
TFM 2500-SP/100	7 mm	high-gloss polished	natural	100 cm
TFM 1400-SP/250	7 mm	high-gloss polished	natural	250 cm
TFM 2500-SP/250	7 mm	high-gloss polished	natural	250 cm
TFM 2500/100	7 mm	natural	natural	100 cm
TFM 2500/250	7 mm	natural	natural	250 cm
TFM 1400-SC/100	9 mm	chromed	chrome	100 cm
TFM 1400-SC/250	9 mm	chromed	chrome	250 cm
TFM 1400-SP/100	9 mm	high-gloss polished	natural	100 cm
TFM 1400/100	9 mm	natural	natural	100 cm
TFM 1400/250	9 mm	natural	natural	250 cm

Please note: For technical reasons, tolerances in color effects of the materials and print are possible. All information is based on the best of our knowledge and belief. No guarantee can be derived from this. We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.